

1605

Thank you for purchasing our SOFA

Before you start, here are some helpful advice:


- 1. We suggest you spend a short time reading through this leaflet and then follow the simple step-by-step instructions.
- 2. Please assemble according to the instruction manual corresponding to the specifications of the sofa you purchased.
- 3.Owing to the size and weight of the sofa, we recommend that it is assembled by two adults, on a carpeted or padded area, in the room that it is intended for. Approximate assembly time: 30 minutes.
- 4. Please do not use any tools other than those provided or recommended in these instructions.
- 5. Please do not throw away any of the packaging or the instruction until you have checked all the components and hardware and the furniture is fully assembled. Please ensure that the packaging is disposed of in a safe and environmentally friendly way.
- 6. Assemble all components loosely until advised to tighten. Depending on use, it may be necessary to tighten the components from time to time, so please save the tools that have been provided.
- 7. Please keep all pieces out of reach of children.
- 8. If you have any questions about the product: please send an email to our dedicated customer service Email-sales11@furninovagroup.com, and we will reply to your questions within 12 hours.

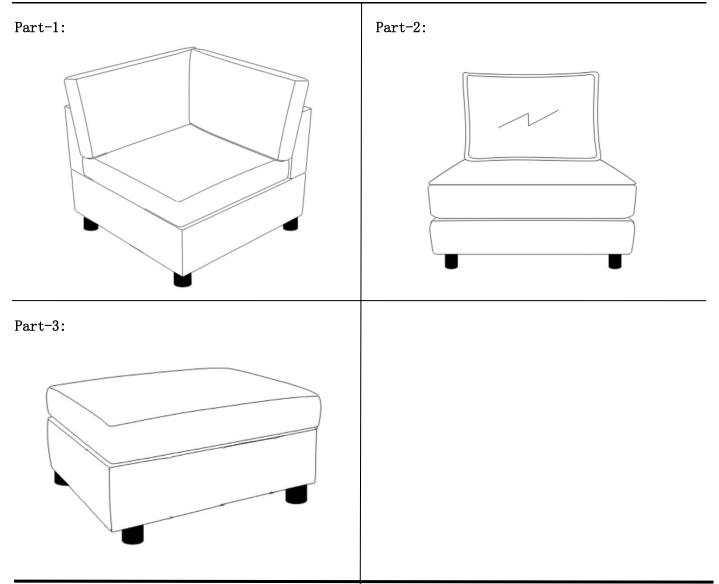

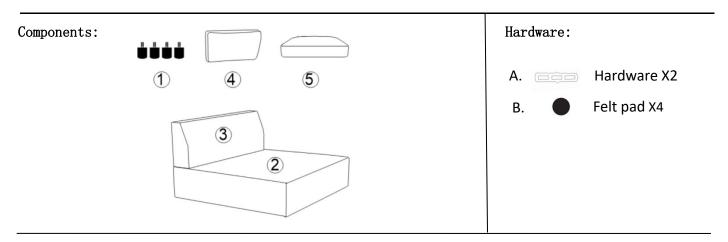


Open up of Non-Woven Fabric coveron the bottom to revove hardware 、 legs and parts

- 1. Please open the brown woven fabric with Velcro closure on the bottom of the frame then cut off the black straps beforeremoving the parts for assembly.
- 2. After removing the cushion from the compress bag, please allow air to flow through the cushion for few days. You can try to fluff cushion by push in and push out on all foursides of the cushion. Hitting the top/front of the cushionwith your hand to fluff them after installation.
- 3. Please allow at least 24 hours for the cushions torecover to its natural state after removingfrom the package.

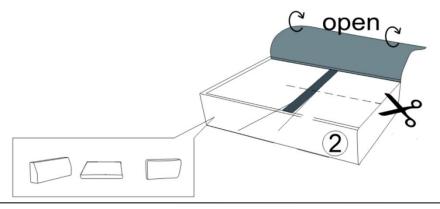

STEP 1:


1. Tighten 4 pieces of Legs (1) to the front bottom of the Sofa Seat (2) clockwise as shown by hand. Then stick 4 pieces of the Felt Pads (B) to the bottom of the Legs (1).

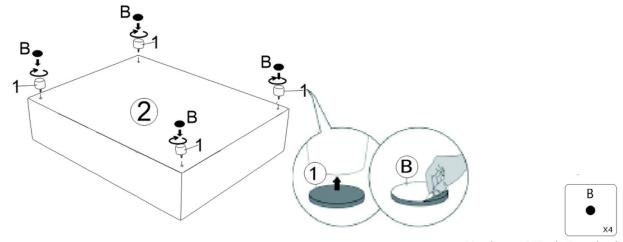

Hardware & Tools Required

STEP 2:


1. Attach Sofa back (3) to the Sofa Seat (2) by using 2 pieces of Hardware(A) as shown.

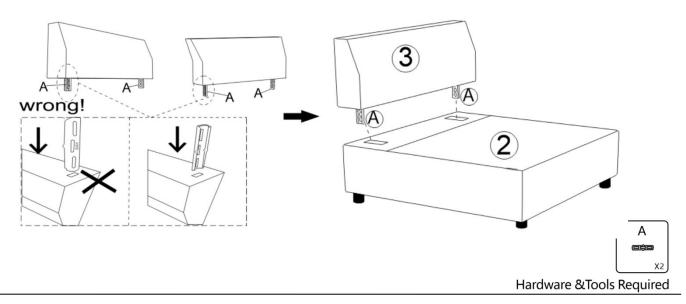

STEP 3:


1. Pat it gently to make it bounce back better and fluffierKnead the **Back Cushion (4)** like you're giving it a massage, allowing air toflow through the foam.


·····About the state of the cushion bag/pillow



STEP 4:


- 1. Please kindly remove the black cover tape from the velcro before you place the cushion on top.
- 2. Carefully put Cushion (5) and Back Cushion (4) to the assembled Sofa Seat (2) and Sofa Back (3) as shown.

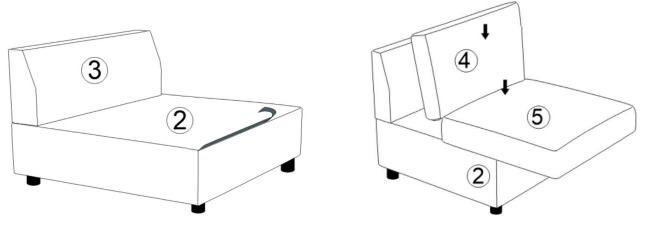

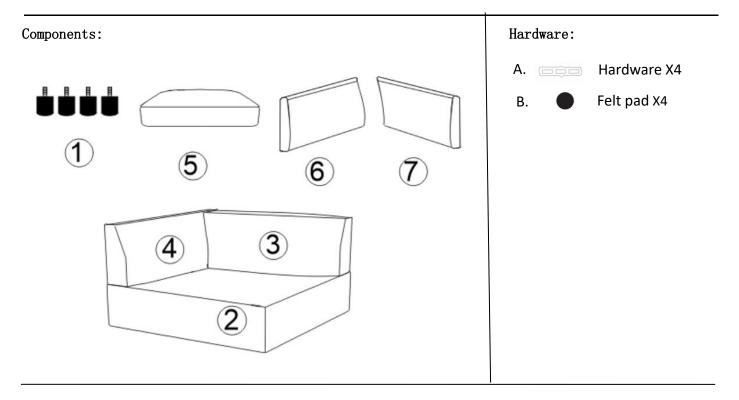

Open up of Non-Woven Fabric coveron the bottom to revove hardware \ legs and parts


- 1. Please open the brown woven fabric with Velcro closure on the bottom of the frame then cut off the black straps beforeremoving the parts for assembly.
- 2. After removing the cushion from the compress bag, please allow air to flow through the cushion for few days. You can try to fluff cushion by push in and push out on all foursides of the cushion. Hitting the top/front of the cushionwith your hand to fluff them after installation.
- 3. Please allow at least 24 hours for the cushions torecover to its natural state after removingfrom the package.

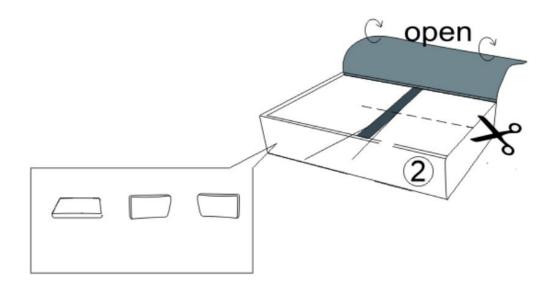

1605


STEP 1:

1. Tighten 4 pieces of Legs (1) to the front bottom of the Sofa Seat (2) clockwise as shown by hand. Then stick 4 pieces of the Felt Pads (B) to the bottom of the Legs (1).

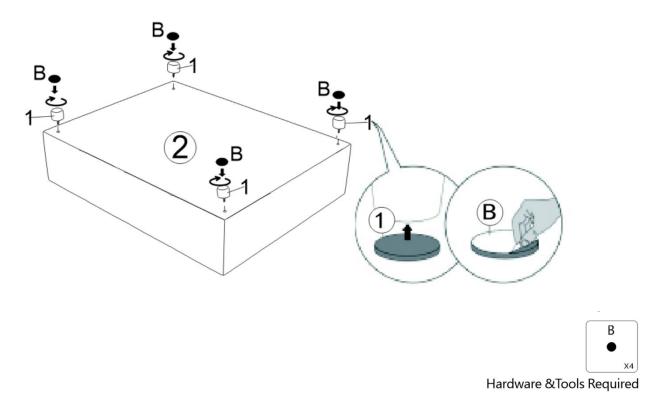

STEP 2:

- 1. Attach Sofa back (4) to the Sofa Seat (2) by using 2 pieces of Hardware(A) as shown.
- 2. Attach Arm back (3) to the Sofa Seat (2) by using 2 pieces of Hardware(A) as shown.

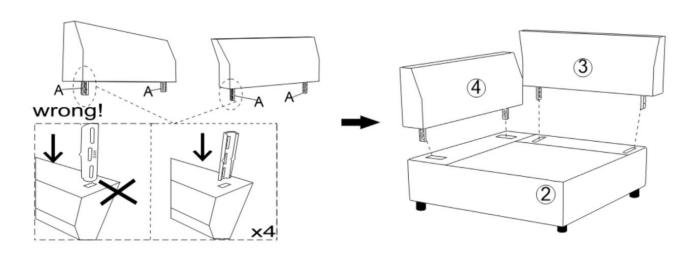




Hardware & Tools Required

STEP 3:


1. Pat it gently to make it bounce back better and fluffierKnead the **Back Cushion (6)** and **Arm Cushion (7)** like you're giving it a massage, allowing air toflow through the foam.


·····About the state of the cushion bag/pillow

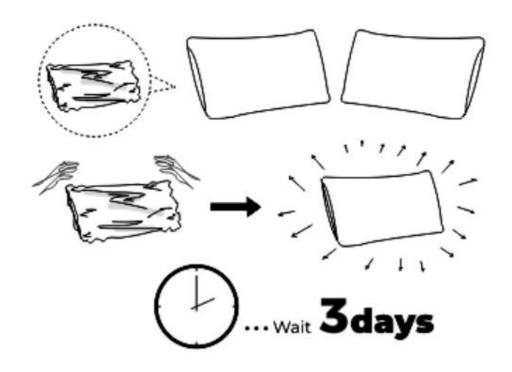


STEP 4:

- 2. Please kindly remove theblack cover tape from the velcro before you place the cushion on top.
- 3. Carefully put Cushion (5) Sack Cushion (6) and Arm Cushion (7) to the assembled Sofa Seat (2) Sofa Back (3) and Arm Back (4) as shown.

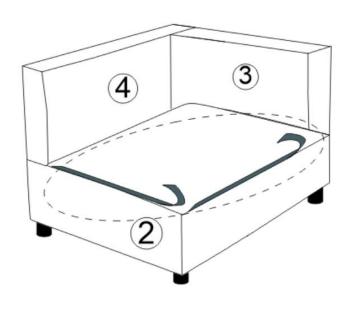




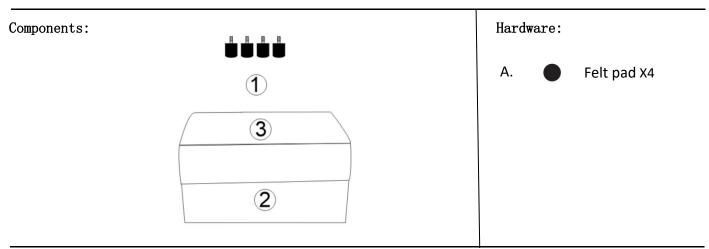


Open up of Non-Woven Fabric coveron the bottom to revove hardware \, legs and parts

- 1. Please open the brown woven fabric with Velcro closure on the bottom of the frame then cut off the black straps beforeremoving the parts for assembly.
- 2. After removing the cushion from the compress bag, please allow air to flow through the cushion for few days. You can try to fluff cushion by push in and push out on all foursides of the cushion. Hitting the top/front of the cushionwith your hand to fluff them after installation.
- 3. Please allow at least 24 hours for the cushions torecover to its natural state after removingfrom the package

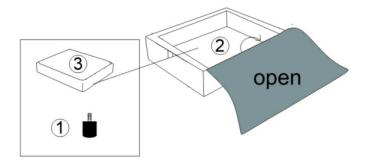

STEP 1:

1. Tighten 4 pieces of Legs (1) to the front bottom of the Sofa Seat (2) clockwise as shown by hand. Then stick 4 pieces of the Felt Pads (B) to the bottom of the Legs (1).

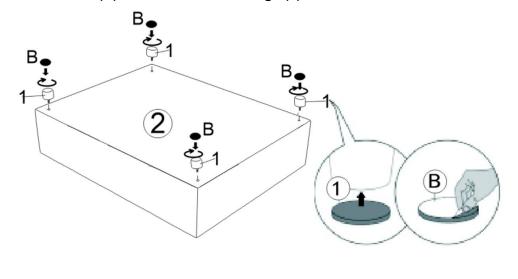





Hardware & Tools Required

STEP 2:


- 1. Please kindly remove theblack cover tape from the velcro before you place the cushion on top.
- 2. Carefully put Cushion (3) to the assembled Sofa Seat (2) as shown.

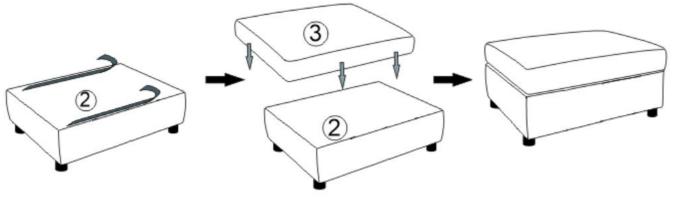

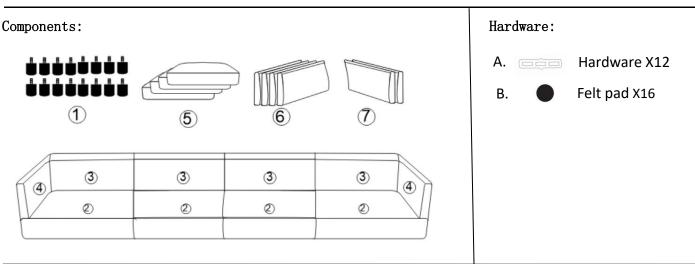


Open up of Non-Woven Fabric coveron the bottom to revove hardware \ legs and parts

- 1. Please open the black woven fabric with Velcro closure on the bottom of the frame then cut off the black straps beforeremoving the parts for assembly.
- 2. After removing the cushion from the compress bag,please allow air to flow through the cushion for few days. You can try to fluff cushion by push in and push out on all foursides of the cushion. Hitting the top/front of the cushionwith your hand to fluff them after installation.
- 3. Please allow at least 24 hours for the cushions torecover to its natural state after removingfrom the package.

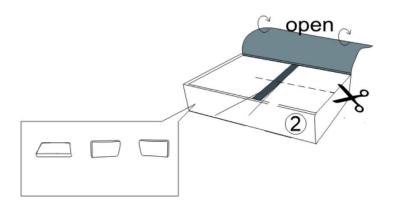


STEP 1:

1. Tighten 16 pieces of **Legs (1)** to the front bottom of the 4 pieces of **Sofa Seat (2)** clockwise as shown by hand. Then stick 16 pieces of the Felt Pads **(B)** to the bottom of the **Legs (1)**.

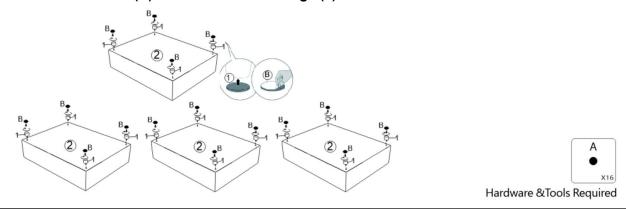


STEP 2:

1. There is velcro on 4 pieces of **Sofa Seat (2)** to lock each other as shown.

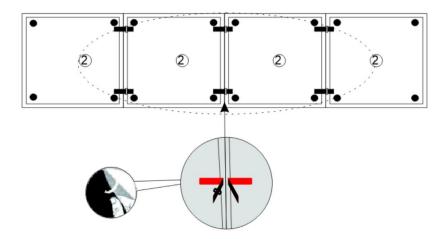

STEP 3:


1. Attach 4 pieces of **Sofa back (3)** and 2 pieces of **Arm back (4)** to the 4 pieces of **Sofa Seat (2)** by using 12 pieces of **Hardware(A)** as shown.

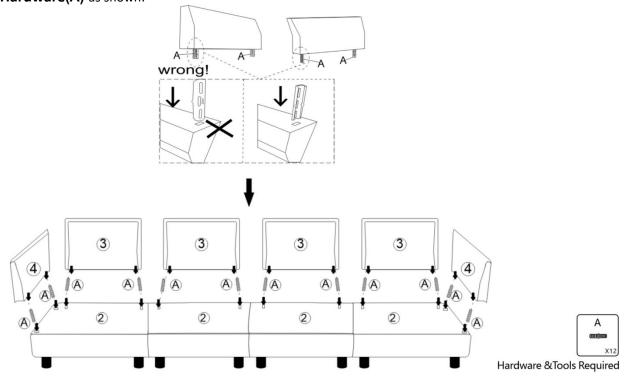

STEP 4:


1. Pat it gently to make it bounce back better and fluffierKnead the **Back Cushion (6)** and **Arm Cushion (7)** like you're giving it a massage, allowing air toflow through the foam.

.....About the state of the cushion bag/pillow

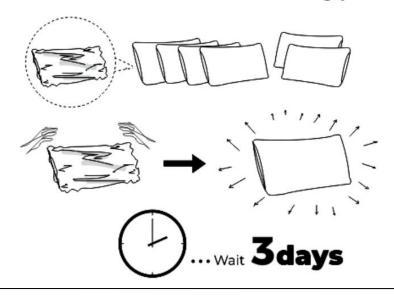


STEP 5:

- 1. Please kindly remove theblack cover tape from the velcro before you place the cushion on top.
- 2. Carefully put 4 pieces of Cushion (5) \(4 \) pieces of Back Cushion (6) and 2 pieces of Arm Cushion (7) to the assembled 4 pieces of Sofa Seat (2) \(4 \) pieces of Sofa Back (3) and 2 pieces of Arm Back (4) as shown.

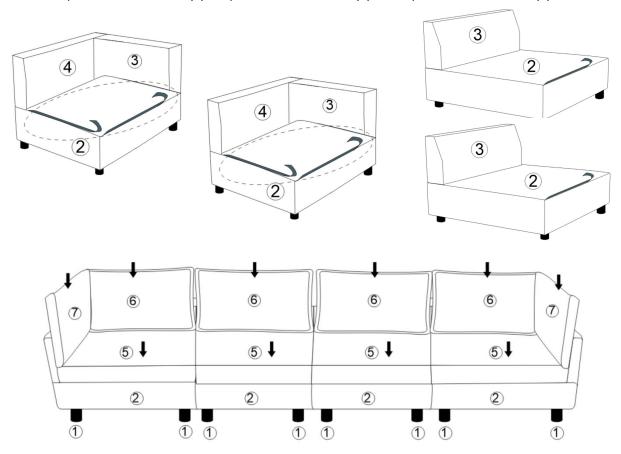

Thank you for the assembly. The assembly is complete. Your sofa is ready to enjoy now -- From FDL

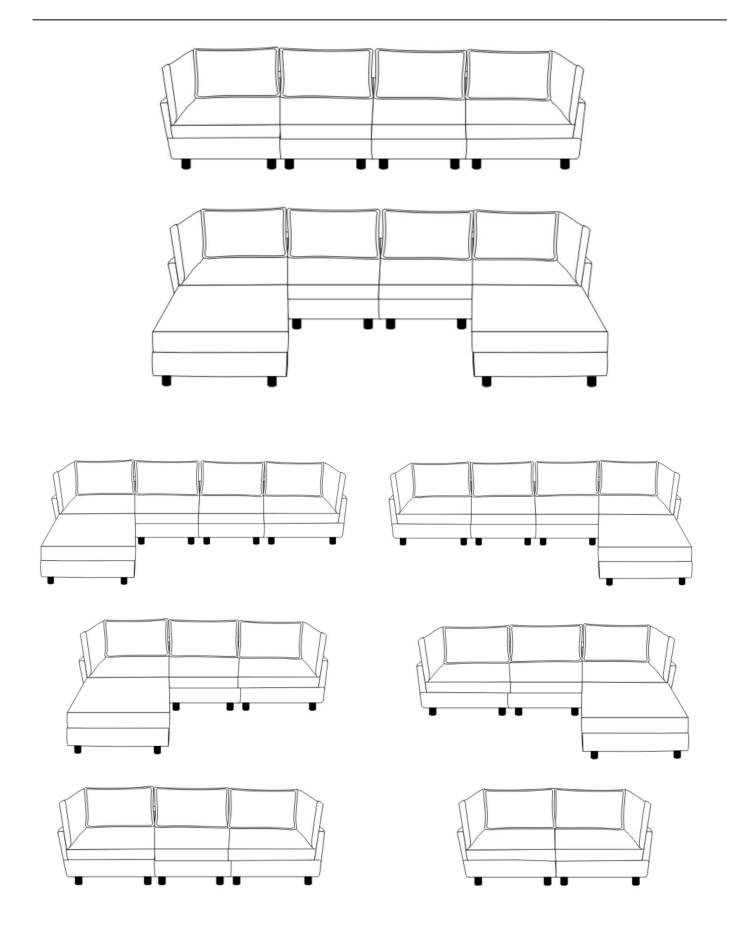

More options is available