
ASSEMBLY INSTRUCTIONS

Important Safety Instructions:

- Please read all instructions before beginning assembly
- Please make sure receive all the parcels to start the assembly
- For your safety and convenience, assembly by two people is recommended
- Use the parts and hardware lists to identify and separate each of the components included
- Save all packing materials until assembly is completed to avoid the accidental discarding of smaller parts or hardware



PARTS LIST

1 X 1

2 X 1

3 X 1

4 X 2

5 X 1

6 X1

7 X 2

8 X 2


9 X 2

10 X 2

1 X 2

12 X 2


13 X 1

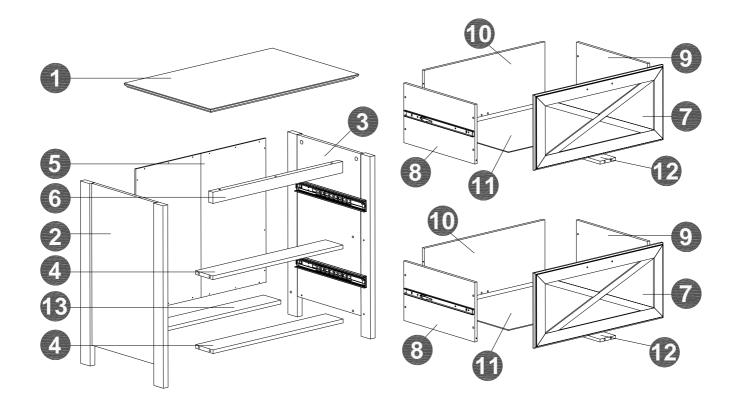



HARDWARE LIST


Name		Part	Qty.	Spare
А			10	1
В			10	1
С			4	
D			4	
E			10	1
A S 4 0 0 2	F		2	
H N 4 0 0 9	H N 4 0 9 2	F	2	
Н			2	
I			4	
J			4	


Name	Name Part		Spare
K	{ mmmmmmm	4	1
L	L { 1-7/8" Screw		
М	M 1-1/2" Screw		
N	9/16" Screw	8	
0	1/2" Screw	14	1
Р	{ 	18	3
S		4	
Y		2	
U1	& promonomono.	4	
U3		4	
U4		2	
U5		2	

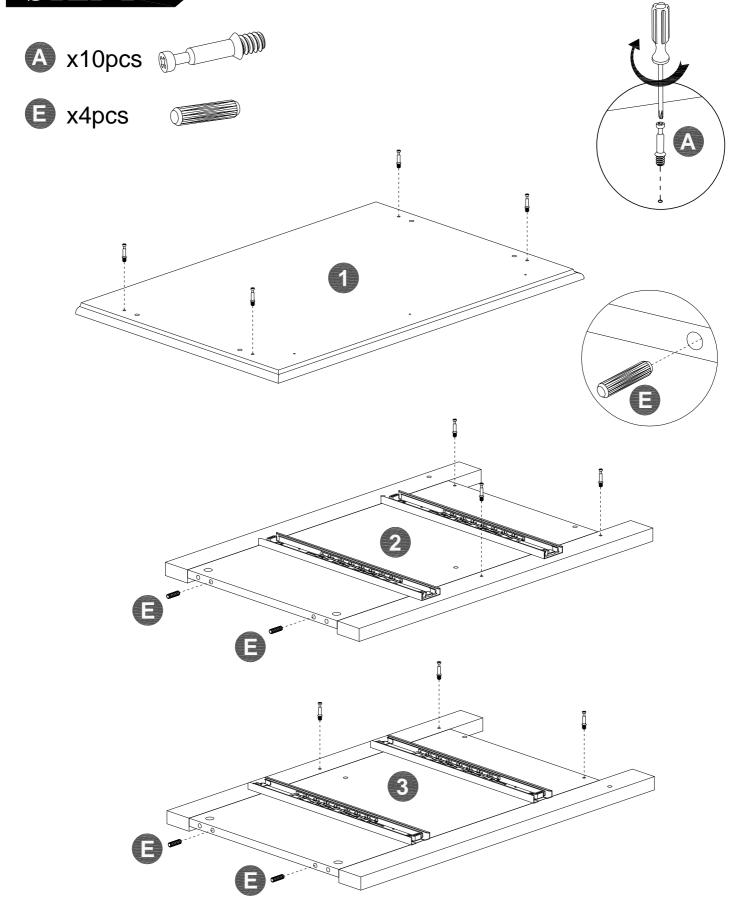


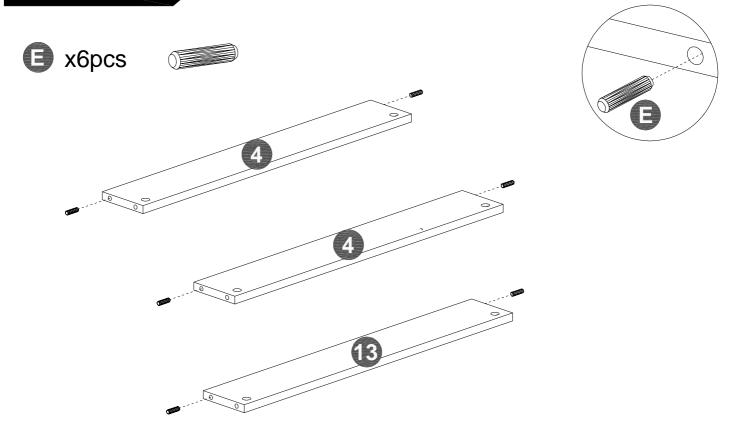


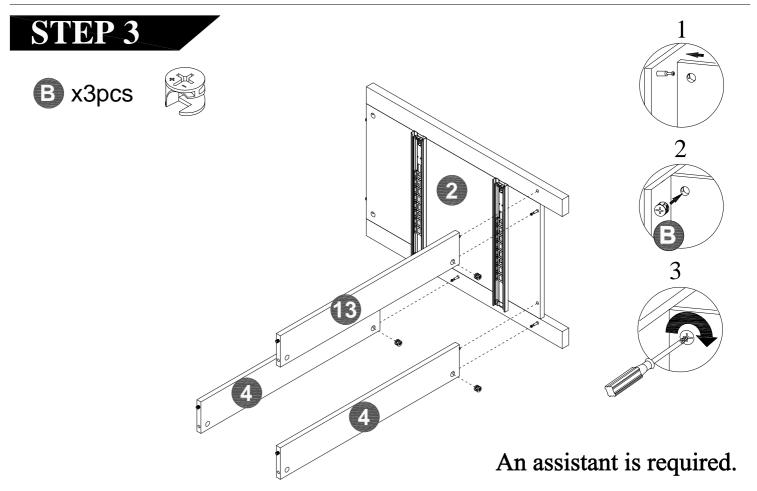


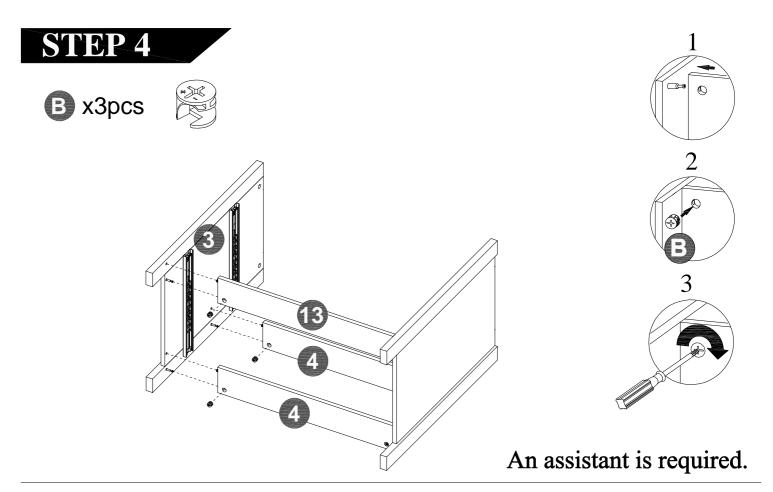


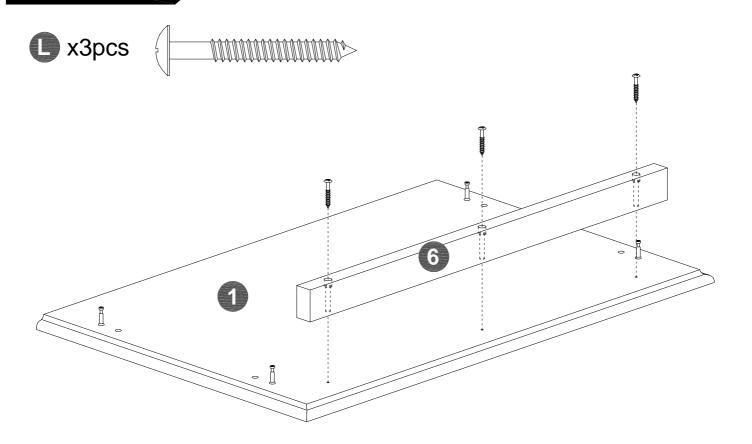

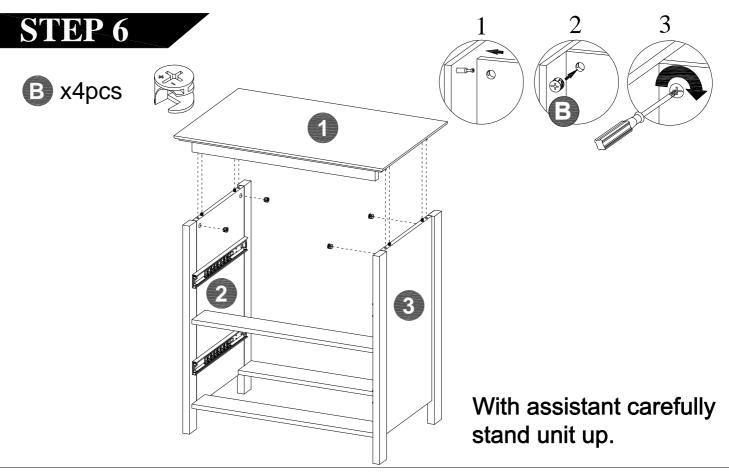

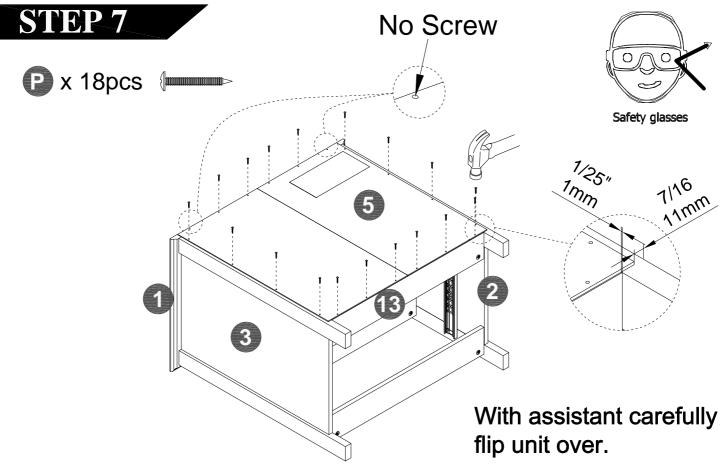








© x4pcs



N x8pcs




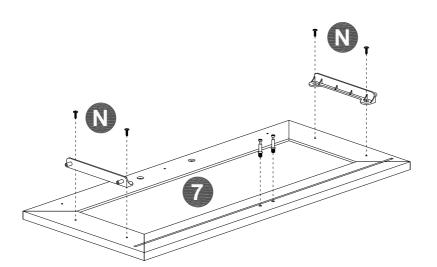



x 2


STEP 9







0 x8pcs





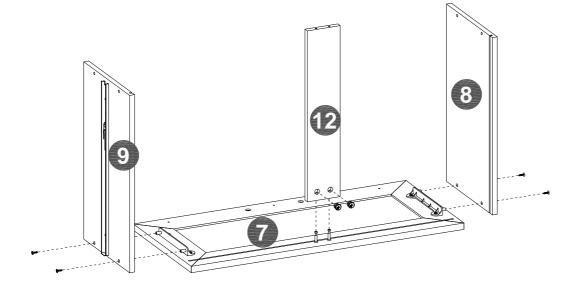

x 2

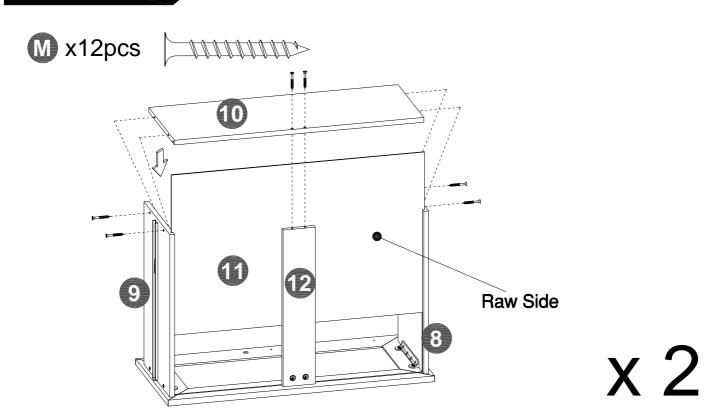


STEP 11

HN4009/HN4092








AS4002













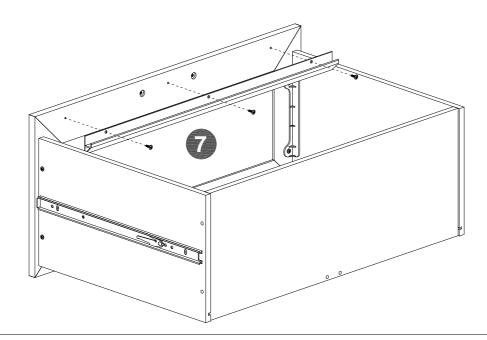


x 2

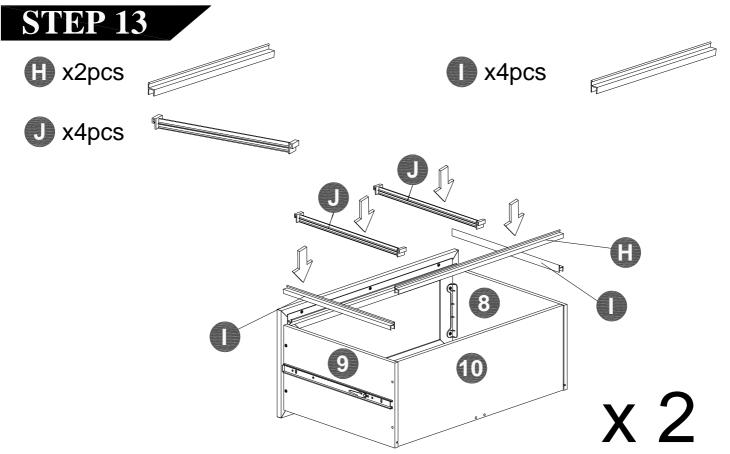


- -Move unit to final location.
- -Adjust drawer fronts as shown below.
- Step1--Loosen screws on back of drawer front brackets as shown.
- Step2--Position drawer front as required.
- Step3--Tighten screws while holding drawer front in position.


DRAWER FRONT VIEW














STEP 2.




STEP 3.



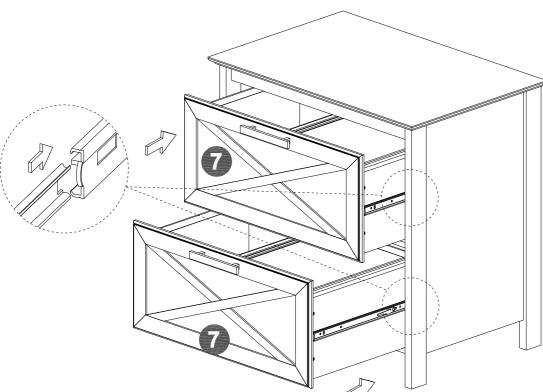



An assistant is required.

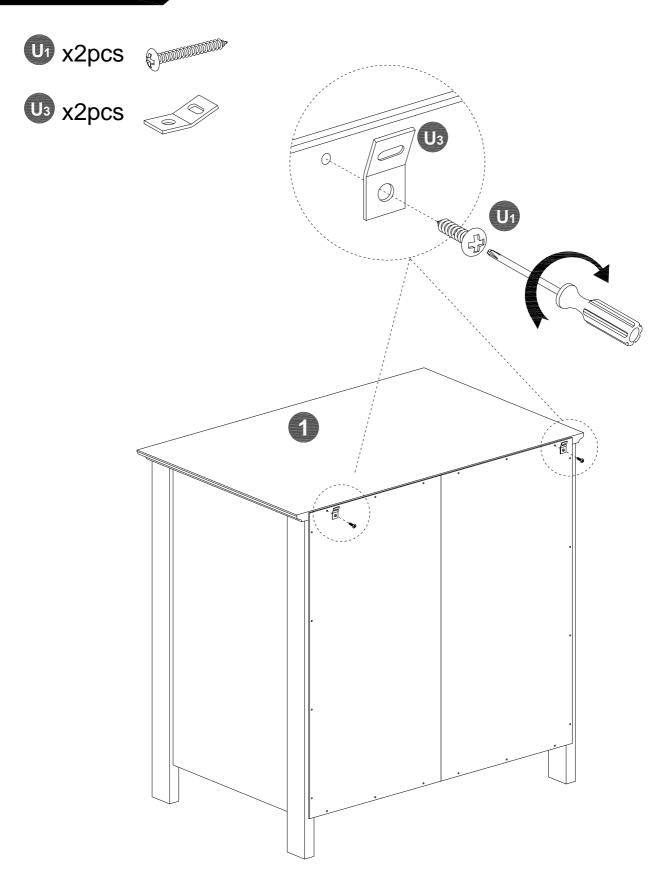


v2pcs v2pcs

- 1. Place unit in desired location.
- 2. Mark stud location on the wall,1" below top and side of unit.
- 3. Drill 5/16"hole 2" deep at marks on the wall.

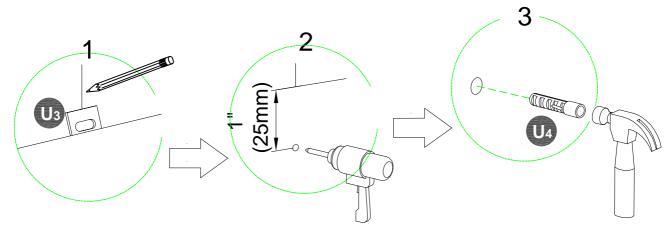

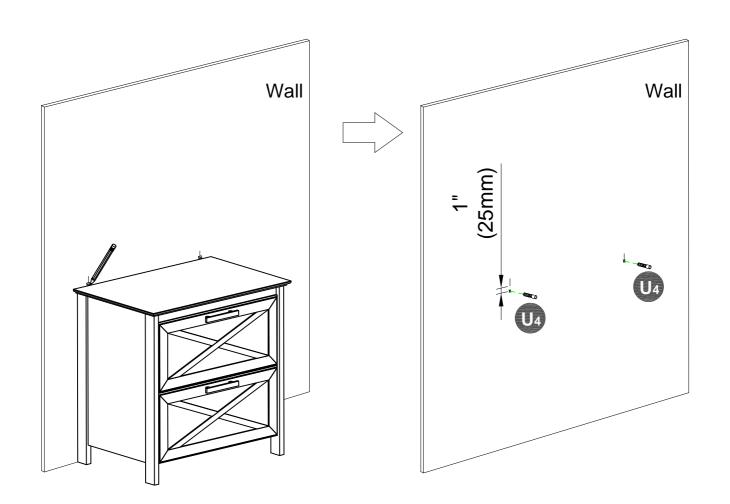

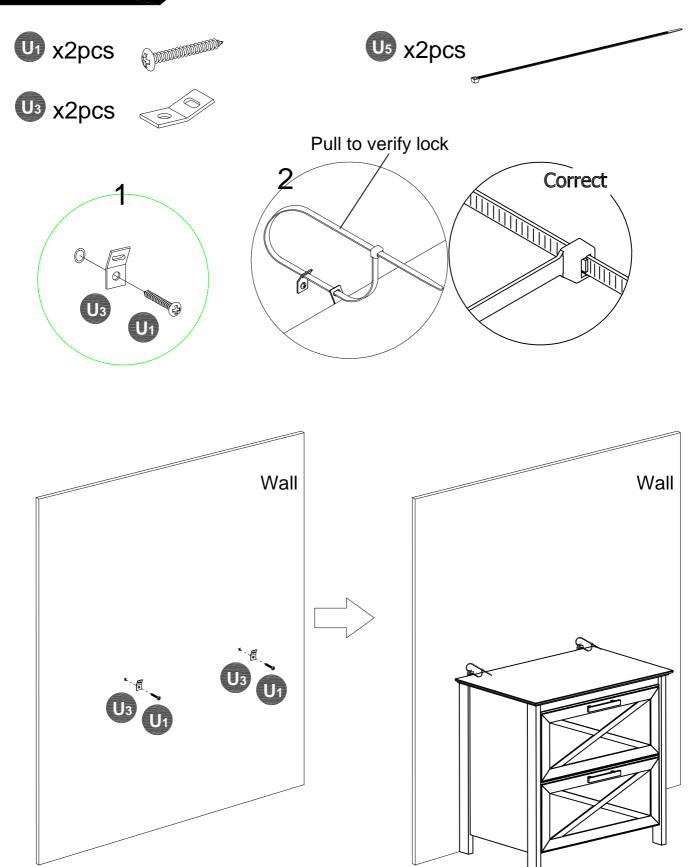

Maximum weight capacities

