

Assembly Instructions

816-013

1/9

WARNING :
TOP BUNKS AND ELEVATED BEDS ARE DANGEROUS AND ARE NOT
RECOMMENDED FOR CHILDREN UNDER THE AGE OF 9

Falls from elevated beds can be fatal and deaths have occurred where children have fallen from elevated beds. This is relevant for all ages. The risk is greater for younger children.


The risk of injury or death from a fall from an elevated bed compared to a non-elevated bed is :

- 10 x greater for 7-8 year olds
- 7 x greater for 9-10 year olds
- 3 x greater for 11-12 year olds

TO HELP PREVENT serious or fatal injuries from entrapment of falls :

- Use the correct size mattress as specified.
- It must be at least 6.25" (160mm) below upper edge of guardrails.
- Follow written instructions with this bed.
- Use guardrails on both sides of upper bunk.
- Prohibits horseplay on or under bed.
- Check the bunk bed periodically to ensure that the guardrail, access device and other components are maintained in the correct position and state of repair and that all connectors are tight.
- Prohibit more than one person on upper bunk.
- Children should be discouraged from playing on the bunk bed.
- Use a mattress which is 53 1/2" - 54" (1358mm)-(1371mm) wide and 74"-75" (1879mm)-(1905mm) long on lower bunk (fullsize.)


WARNING: The upper bunk must be more than 2 m from any ceiling fan.

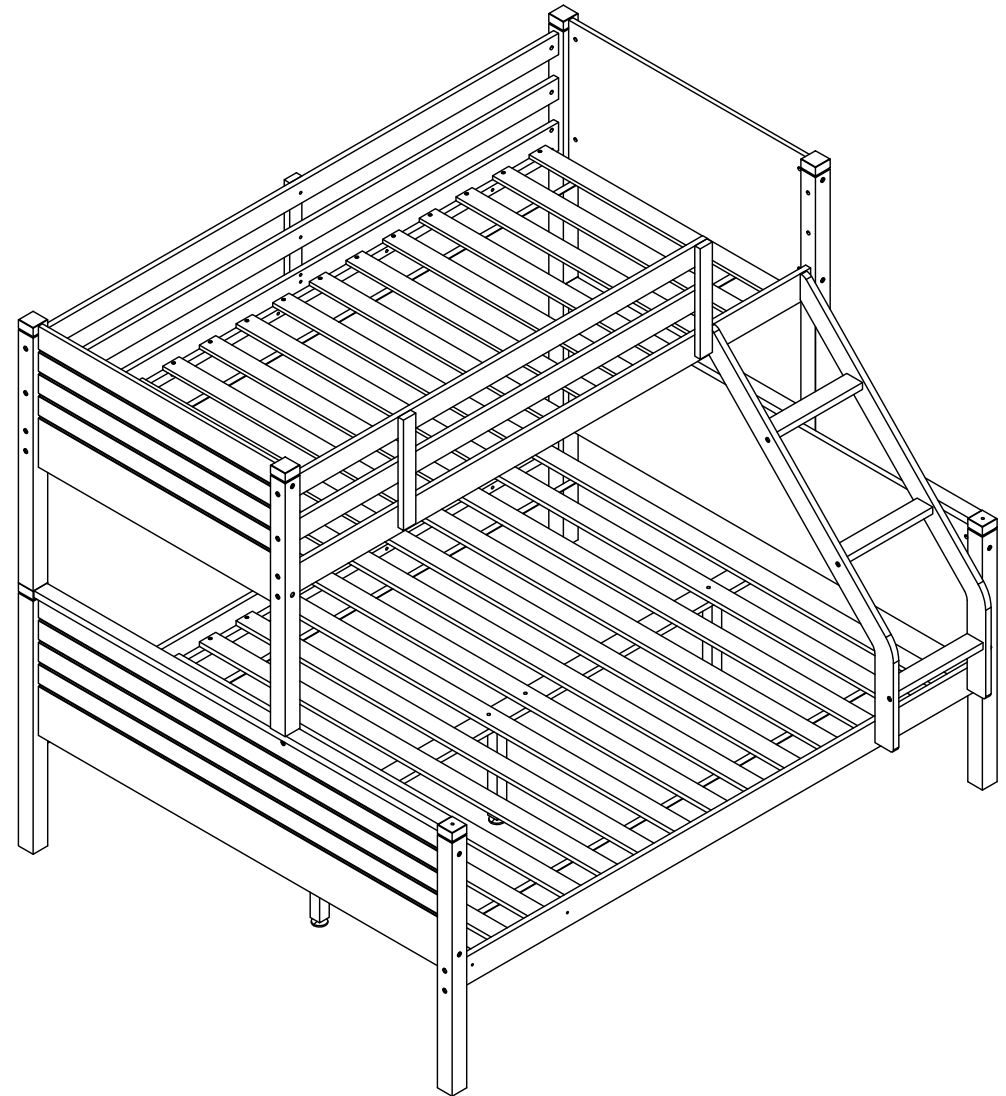


Assembly Instructions

816 - 013

Part in Box

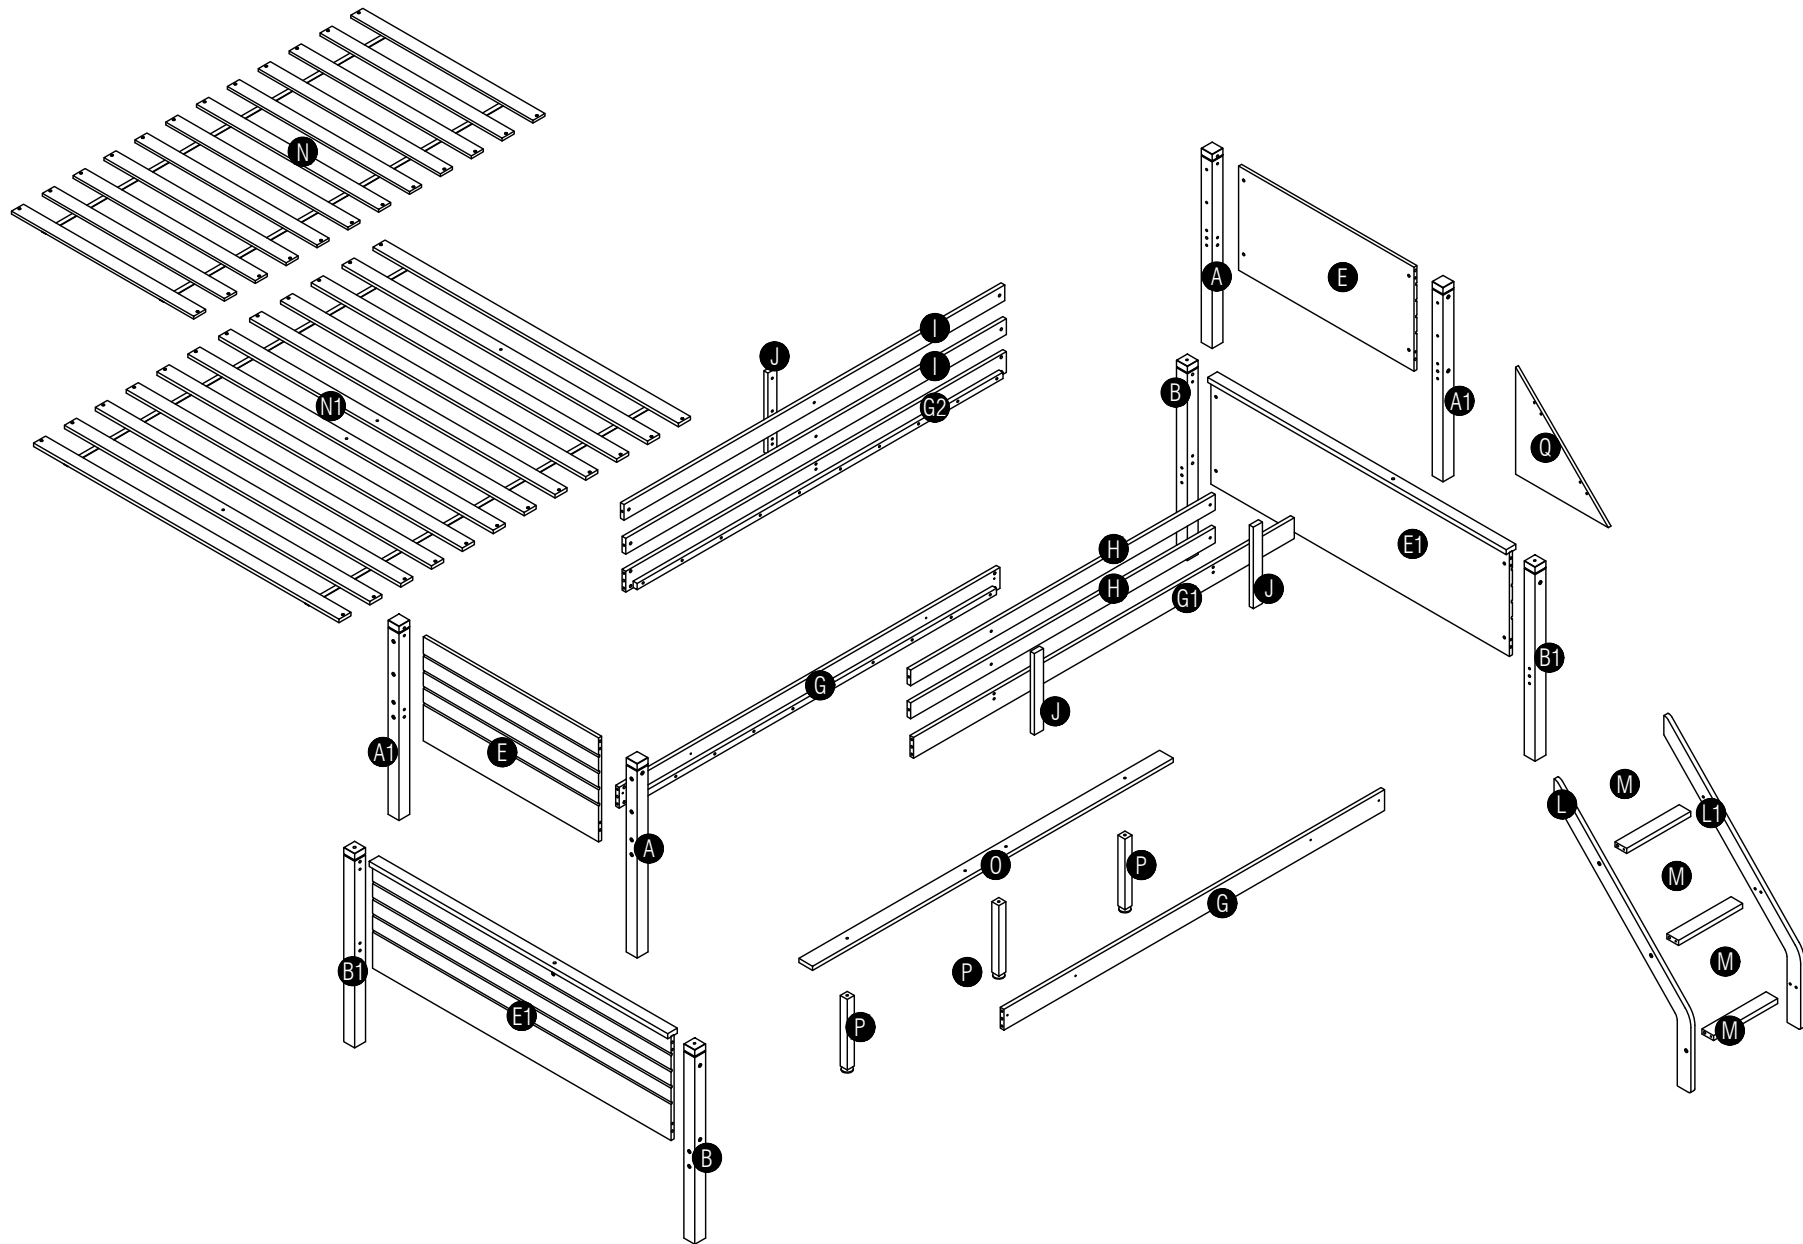

Hardware List

1.	JCBC M6 x 90mm		x 38
2.	JCBC-W M6 x 50mm		x 8
3.	M6 x 13mm (Short) Barrel Nut		x 16
4.	Wood Dowel M10 x 30mm		x 30
5.	M6 x 15mm (Long) Barrel Nut		x 22
6.	CSK M4 x 25mm		x 50
7.	Metal Pin M10 x 100mm		x 4
8.	JCBC-W M6 x 30mm		x 8
9.	JCBC M6 x 30mm		x 18
10.	Ladder Hook		x 2
11.	Sticker Cap		x 4
12.	JCBC M6 x 10mm		x 2
13.	CSK M4 x 16mm		x 6
14.	Adjustable Screw		x 3
15.	M8 Flat Washer		x 3
16.	JCBB M8 x 80mm		x 3
17.	Wood Dowel M8 x 25mm		x 2
18.	M4 Allen Key		x 1
19.	M5 Allen Key		x 1

WARNING !!

- This package contains small parts. Keep away from children until assembly.
- Adult assembly required.
- Phillips head screw driver required.
- Instructions are generic. Figures may vary.
- Screws left after assembly should be kept out of reach of children.
- NOTE - Children under the age of 9 should not use the upper bunk due to the statistical chance of significant injury.
- Children should be discouraged from playing on the bunk bed.
- The bunk bed should be checked periodically to ensure that the guardrail, ladder and other components are maintained in the correct position and state of repair and all connectors are tight.
- The upper bunk must be more than 2m from any ceiling fan.*

Tool required for assembly :
 * Allen Key (supplied)
 * Phillips Screwdriver
 (not supplied)

Assembly Instructions


816 - 013

4/9

1

Assemble the Upper Bunk End Frames.

1.	JCBC M6 x 90mm		x 8
3.	M6 x 13mm (Short) Barrel Nut		x 8
4.	Wood Dowel M10 x 30mm		x 8

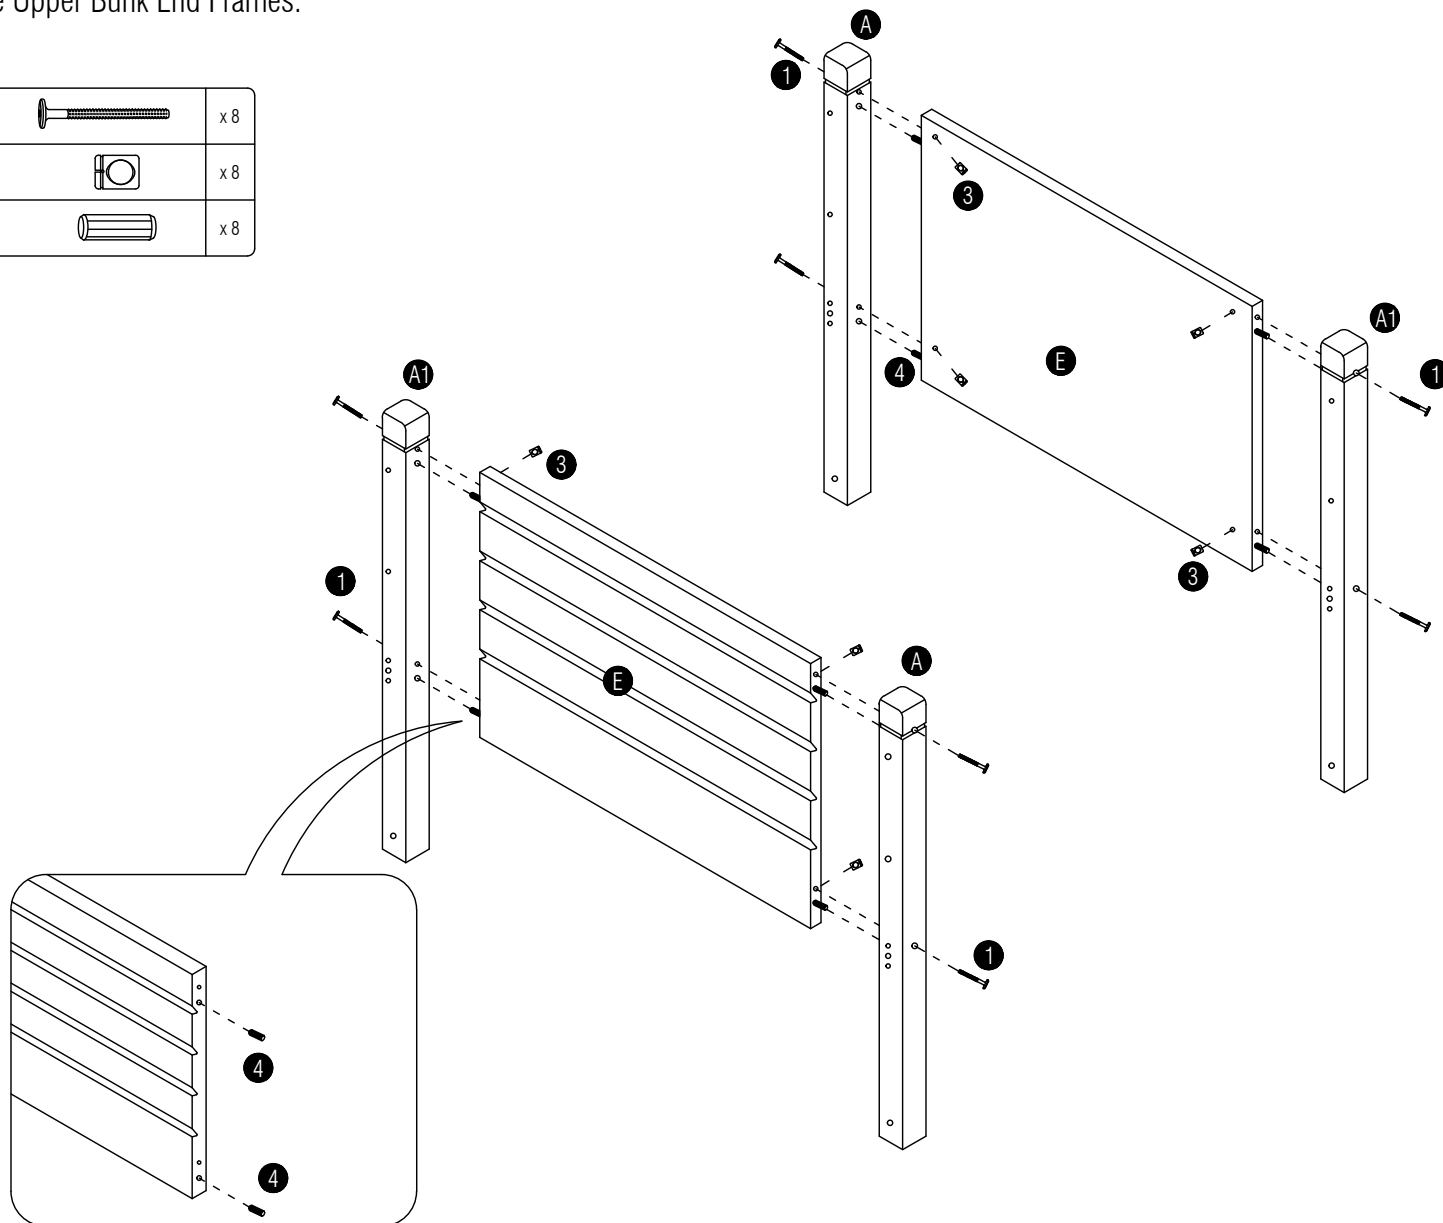

Assembly Instructions


816 - 013

5/9

2

Assemble the Upper Bunk End Frames with the Side Rails(G1)(G2) and Front & Back Guard Rails (I&H). Attach Spindle (J).


1.	JCBC M6 x 90mm		x 14
4.	Wood Dowel M10 x 30mm		x 4
5.	M6 x 15mm (Long) Barrel Nut		x 14
9.	JCBC M6 x 30mm		x 12

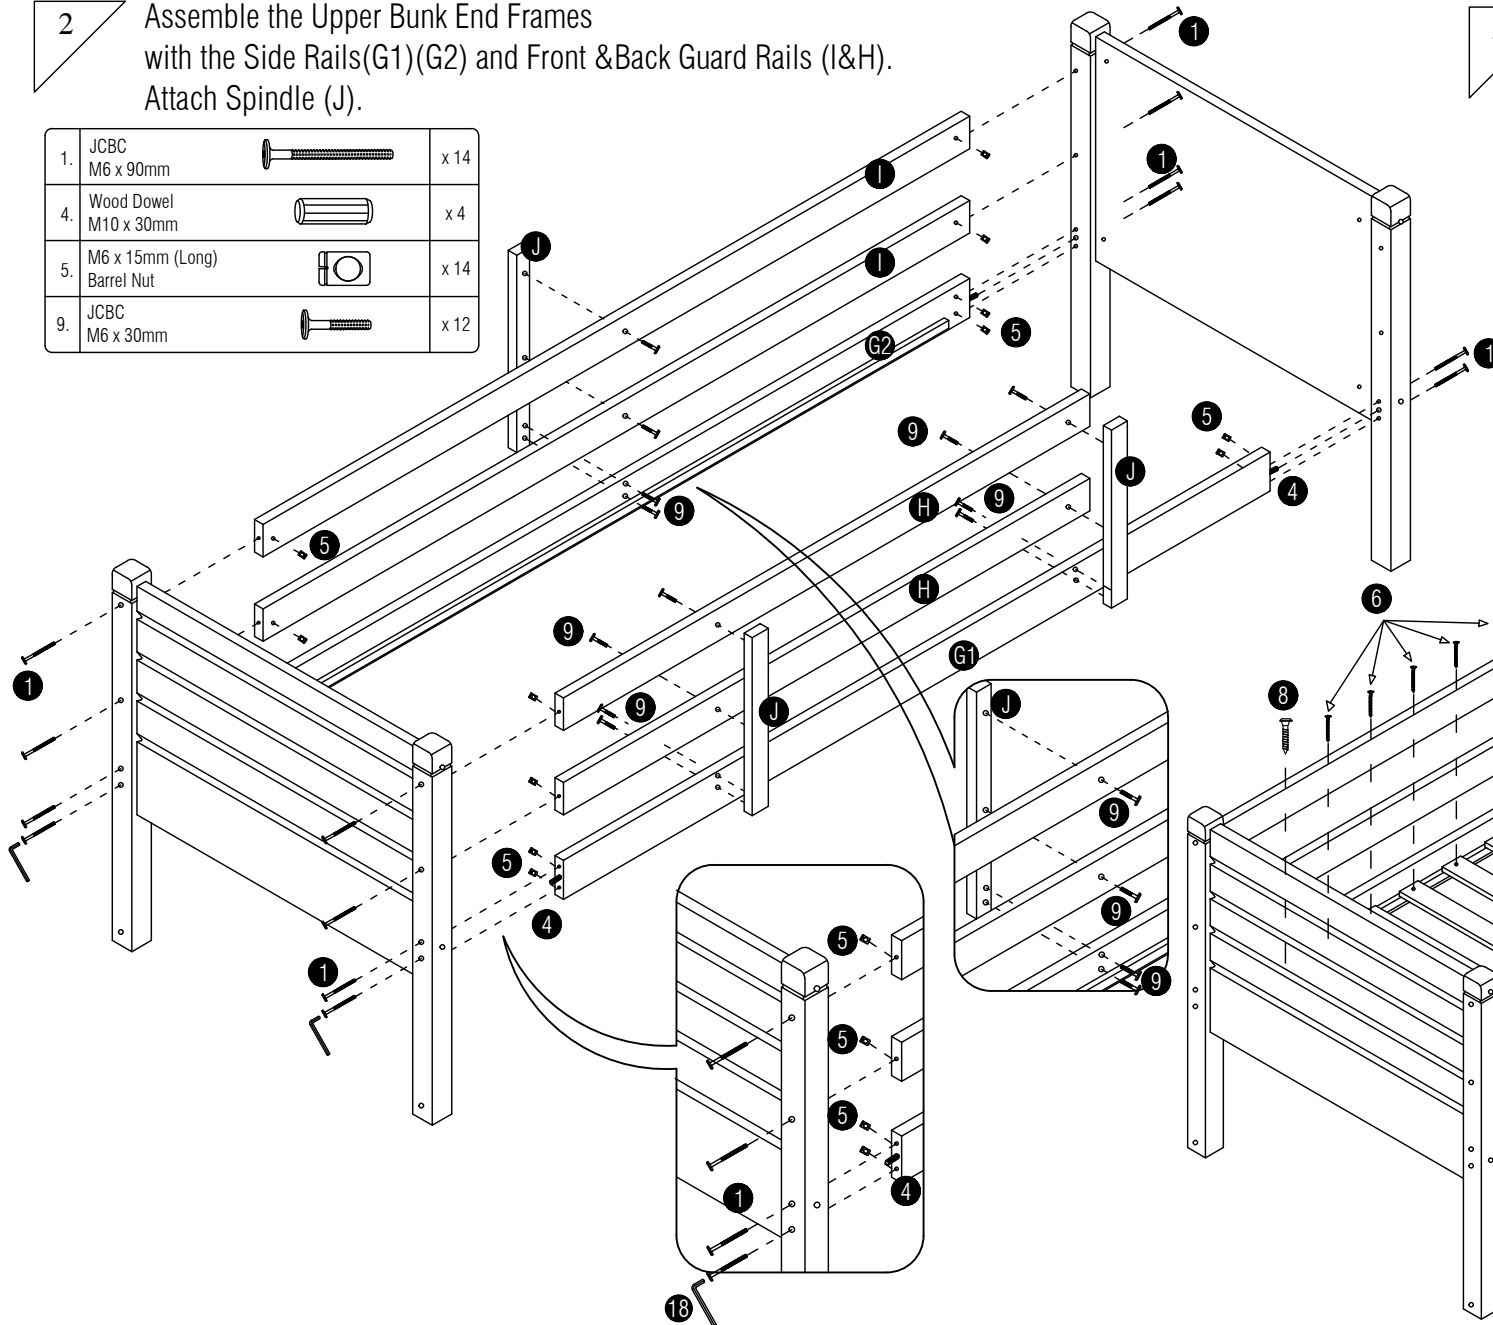

3

Assemble the Slats (N) to the Upper Bunk.

6.	CSK Screw M4 x 25mm		x 24
8.	JCBC-W M6 x 30mm		x 4

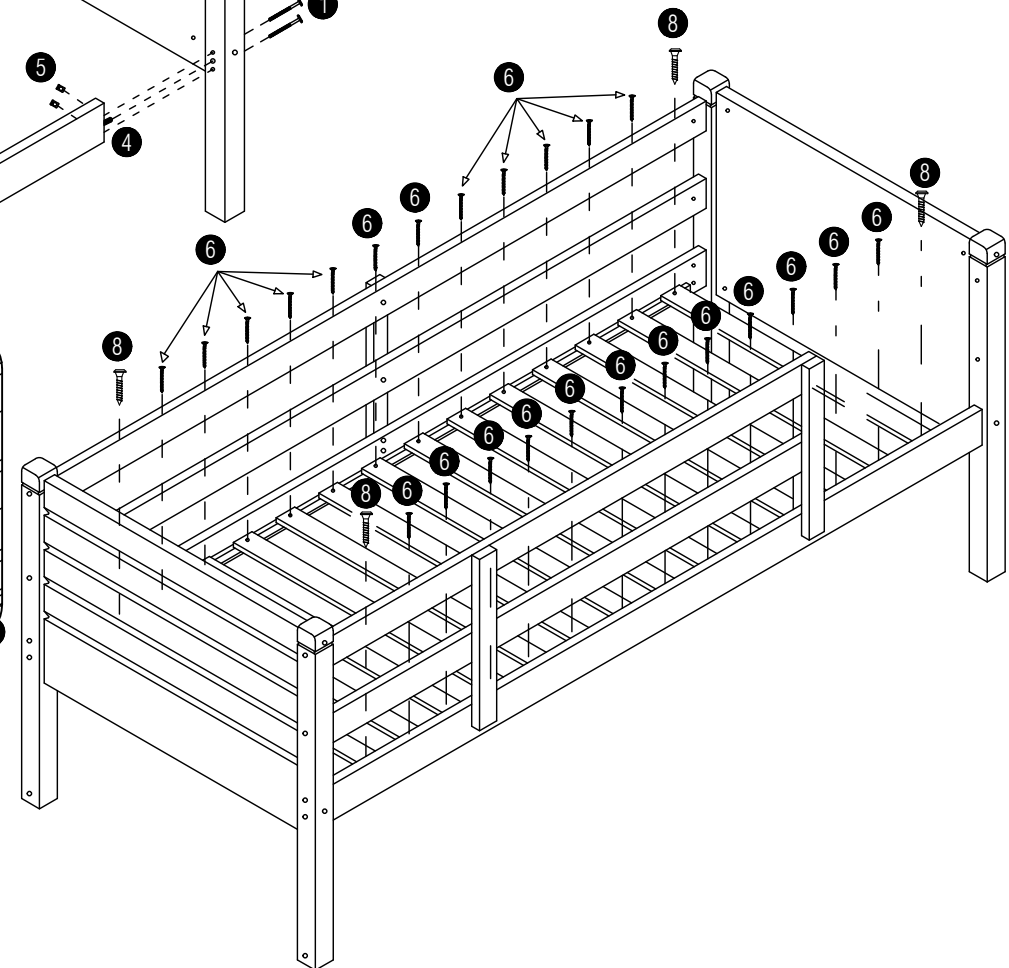

Assembly Instructions


816 - 013

6/9

4

Assemble the Lower Bunk End Frames.

1.	JCBC M6 x 90mm		x 8
3.	M6 x 13mm (Short) Barrel Nut		x 8
4.	Wood Dowel M10 x 30mm		x 8

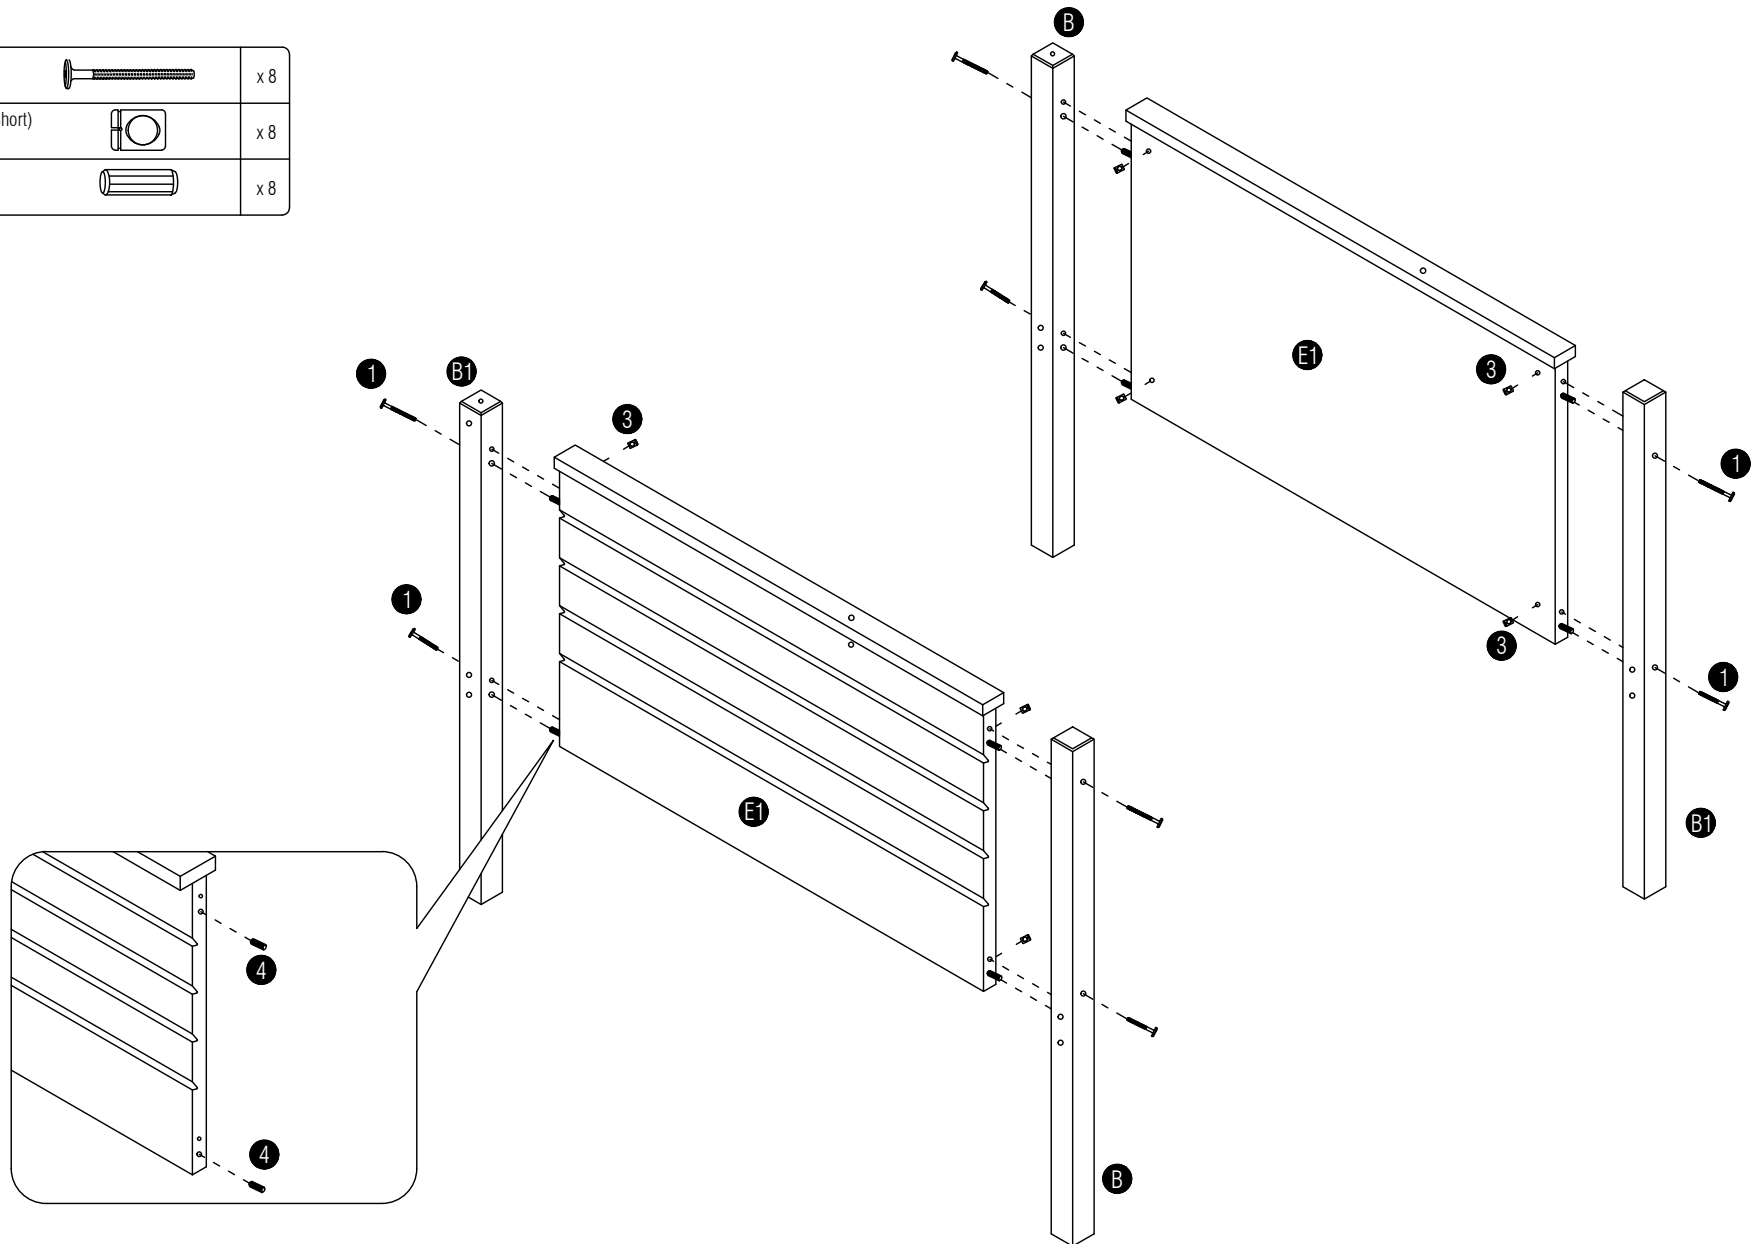


Assembly Instructions

816 - 013

7/9


5 Assemble the Lower Bunk End Frames with the Side Rails(G).

1.	JCBC M6 x 90mm		x 8
4.	Wood Dowel M10 x 30mm		x 4
5.	M6 x 15mm (Long) Barrel Nut		x 8
7.	Metal Pin M10 x 100mm		x 4
9.	JCBC M6 x 30mm		x 2
12.	JCBC M6 x 10mm		x 2



6 Lock the Support Legs (P) on Slats (N1) & Center Rail (O). Please Note that the Hex Nut or Support Legs (K) have Adjuster at Bottom. Unscrew to Adjust if necessary. Assemble the Slats (N1) to the Lower Bunk.

6.	CSK Screw M4 x 25mm		x 24
8.	JCBC-W M6 x 30mm		x 4
14.	Adjustable Screw		x 3
15.	Flat Washer		x 3
16.	JCBB M8 x 80mm		x 3

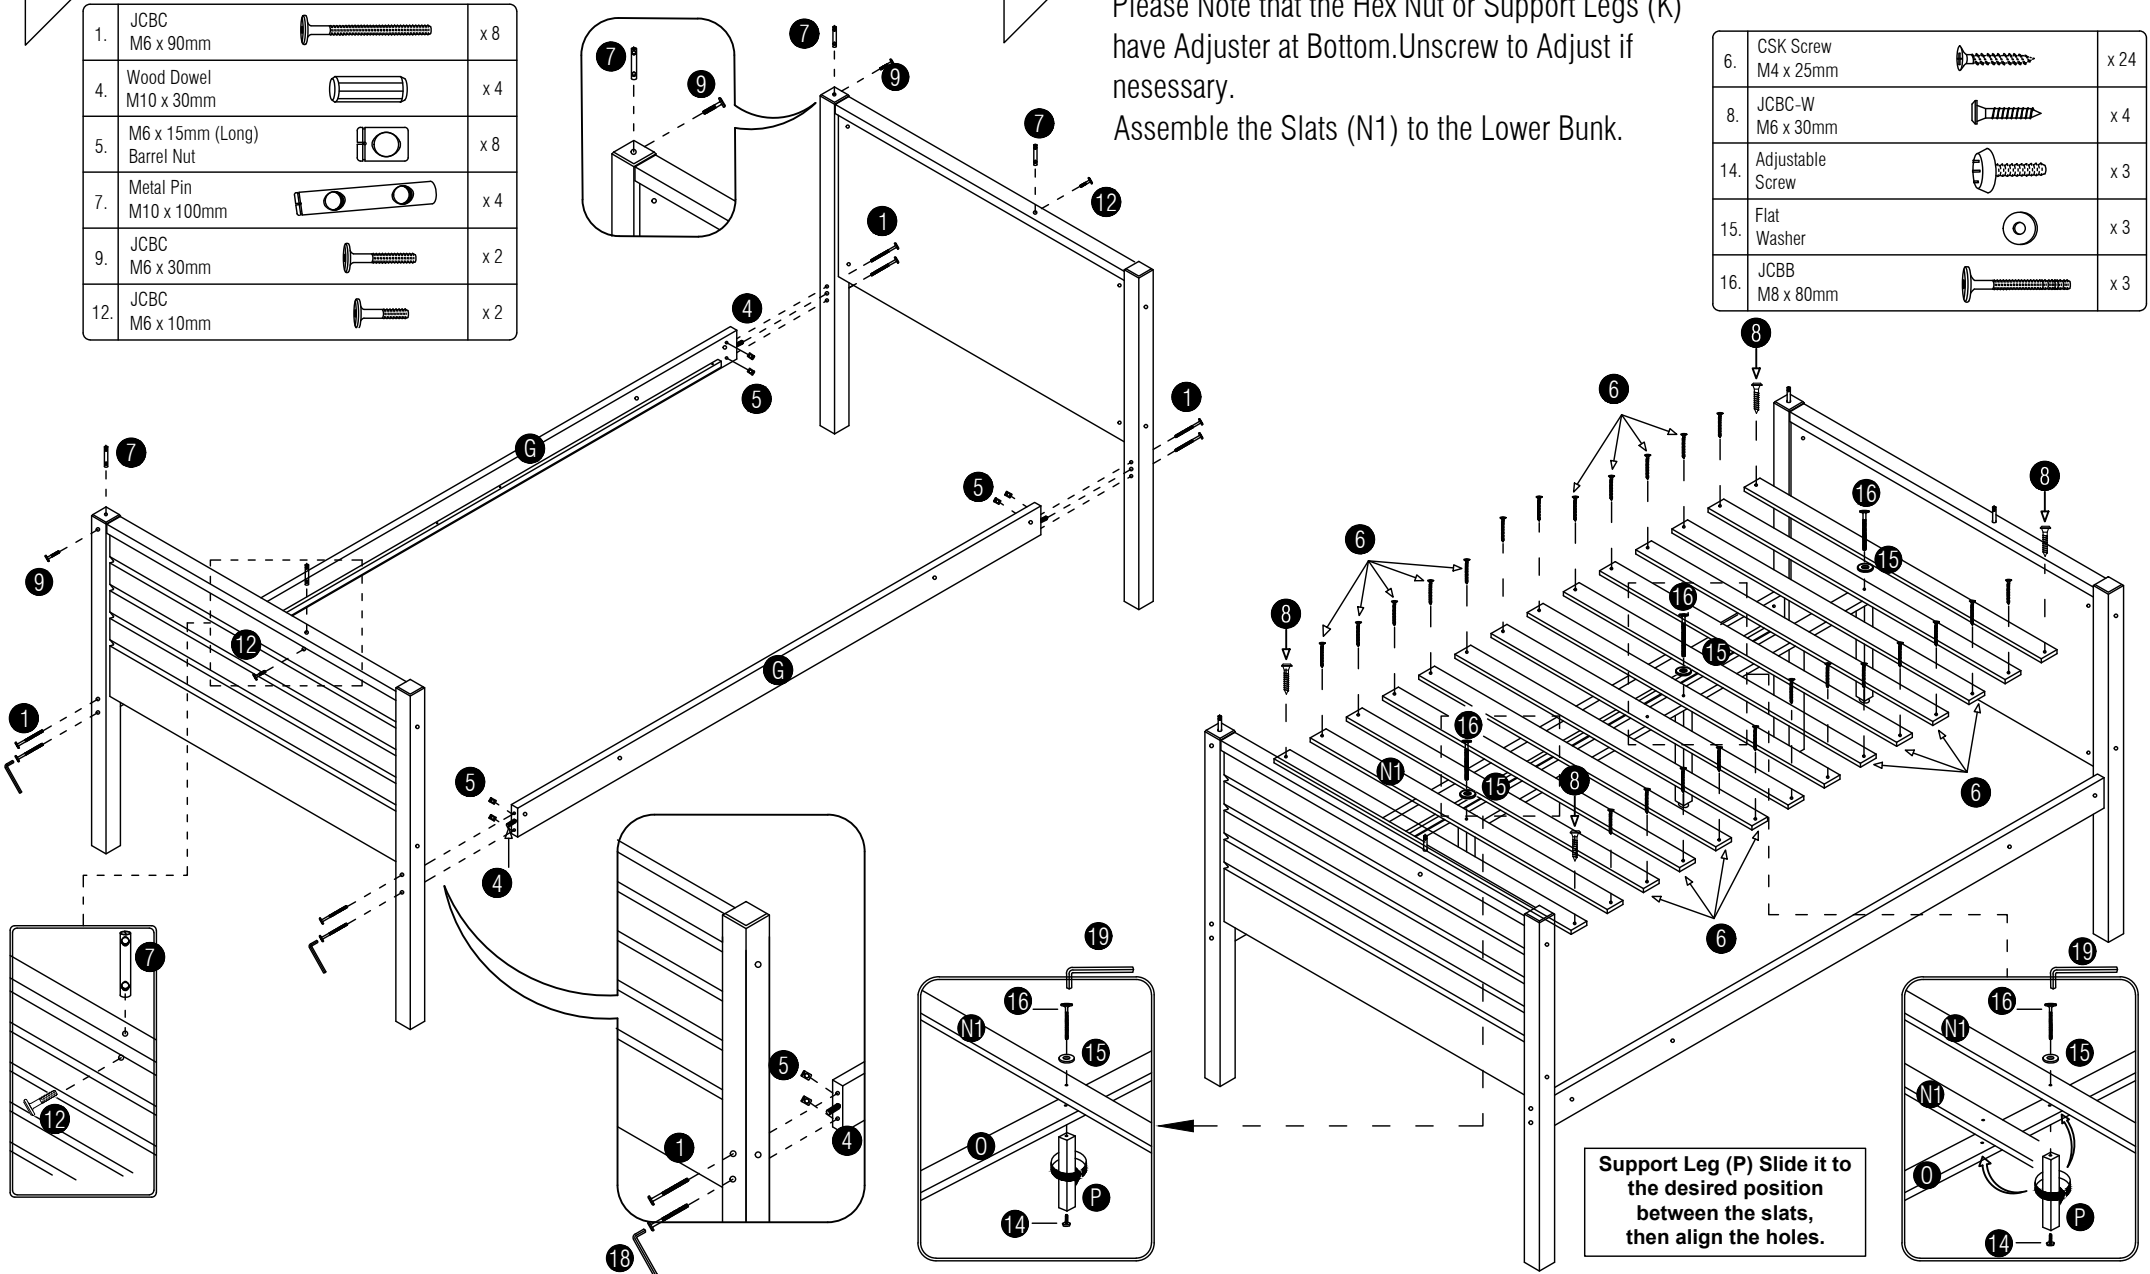

Assembly Instructions

816 - 013





8/9

7 Join the Upper & Lower Bunk.

9.	JCBC M6 x 30mm		x 4
11.	Sticker Cap		x 4

8 Assemble the Ladder (L,L1&M).

2.	JCBC-W M6 x 50mm		x 6
4.	Wood Dowel M10 x 30mm		x 6
10.	Ladder Hook		x 2
13.	Csk Screw M4 x 16mm		x 4

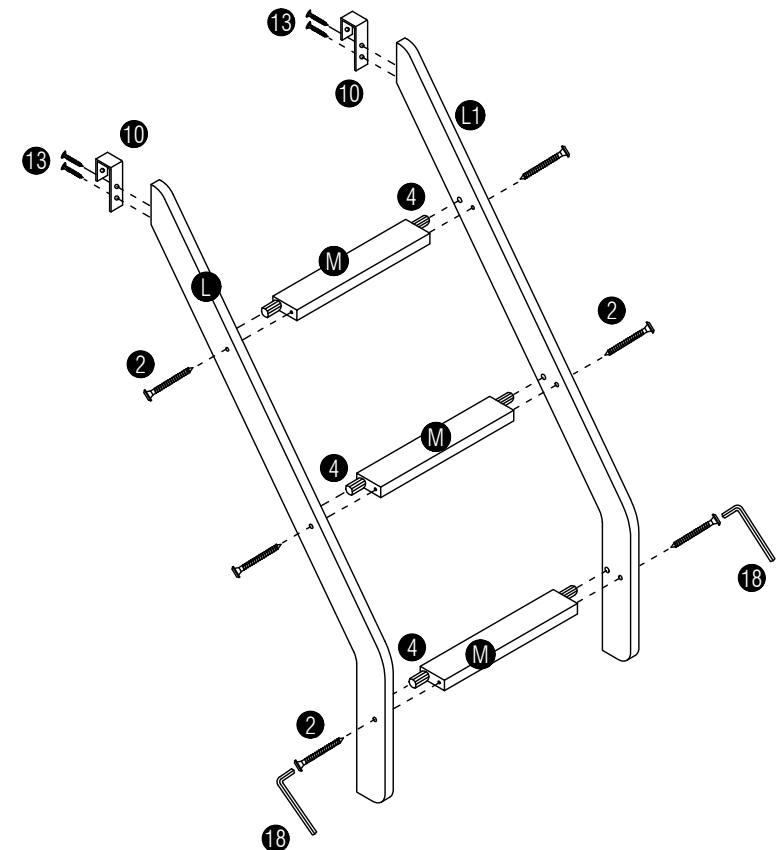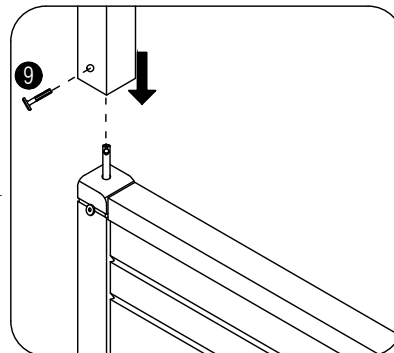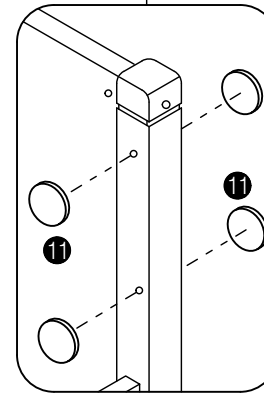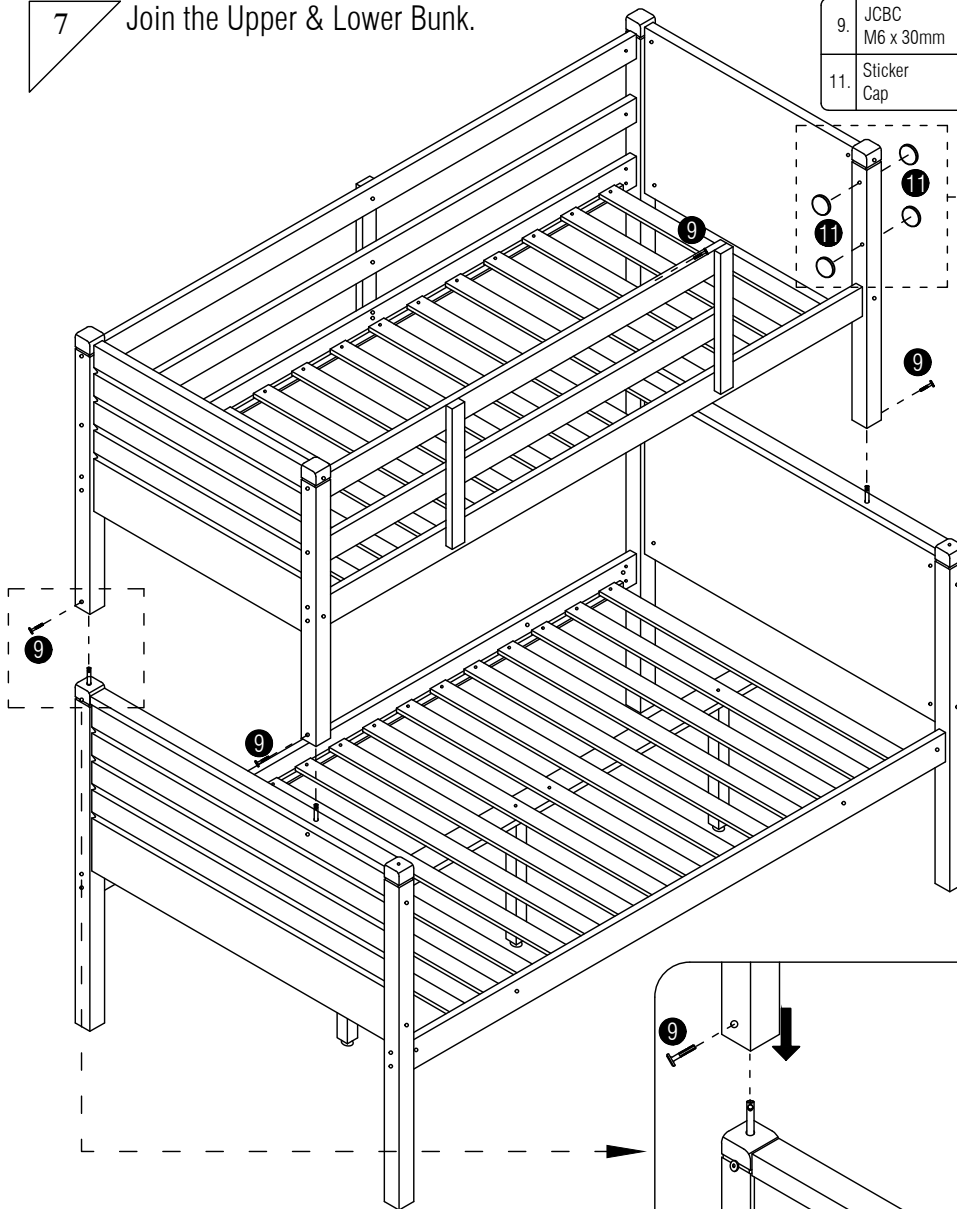

Assembly Instructions


816 - 013

9/9

9 Assemble the Ladder Side Panel (Q) to Ladder Rail.

6.	CSK M4 x 25mm		x 2
17.	Wood Dowel M8 x 25mm		x 2

10 Attach the Ladder to the Upper Bunk.

2.	JCBC M6 x 50mm		x 2
13.	CSK M4 x 16mm		x 2

